

ROGERS & WELLS LLP
200 PARK AVENUE NEW YORK, NY 10166-0153
TELEPHONE 212 878-8000 FACSIMILE 212 878-8375
Joseph P. Kincart
Associate

DIRECT TELEPHONE 212 878-3289
DIRECT FACSIMILE 212-880-5602
kincartj@rw.com

A
jc571 U.S. PTO
09/329889
06/10/99

Date: June 10, 1999

Attorney Docket No.: 005974/00011

Box Patent Application
Assistant Commissioner for Patents
Washington, DC 20231

Presented for filing is a new original patent applications of:

Applicant: Boussac et al.
Title: **SWEPT VOLUME**

Enclosed are the following papers, including those required to receive a filing date under 37 CFR §1.53(b):

	<u>Pages</u>
Specification	10
Claims	3
Abstract	1
Declaration	2
Drawing(s)	8
Assignment	3

- Enclosures:
- Postcard.

"EXPRESS MAIL" Mailing Label Number EI846261375US

Date of Deposit June 10, 1999

I hereby certify under 37 CFR 1.10 that this correspondence is being deposited with the United States Postal Service as "Express Mail Post Office to Addressee" with sufficient postage on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

Carol Felenstein

Carol Felenstein

ROGERS & WELLS LLP

Basic filing fee	760.00
Total claims in excess of 20 times \$18.00	54.00
Independent claims in excess of 3 times \$78.00	<u>156.00</u>
Total filing fee:	970.00

The Commissioner is hereby authorized to charge the required fee for the submission of the patent application, or any additional fees or credit any overpayments in connection with this application to Deposit Account No. 50-0521. A duplicate copy of this sheet is enclosed.

If this application is found to be incomplete, or if a telephone conference would otherwise be helpful, please call the undersigned at 212/878-3289.

Kindly acknowledge receipt of this application by returning the enclosing postcard.

Please send all correspondence to:

Joseph P. Kincart, Esq.
Rogers & Wells LLP
200 Park Avenue
New York, NY 10166

Respectfully submitted,



Joseph P. Kincart
Reg. No. 43,716
Enclosures

**APPLICATION
FOR
UNITED STATES LETTERS PATENT**

TITLE: **SWEPT VOLUME MODEL**

APPLICANT: **Stephane Boussac
Denis Capot-Rey
Laurent Juge**

"EXPRESS MAIL" Mailing Label Number **EI846261375US**

Date of Deposit **JUNE 10, 1999**

I hereby certify under 37 CFR 1.10 that this correspondence is being deposited with the United States Postal Service as "Express Mail Post Office to Addressee" with sufficient postage on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

SWEPT VOLUME MODEL

BACKGROUND

The present invention relates to computer software utility programs, and more specifically to a machine and method for producing a swept volume model in computer aided design and computer aided manufacture (CAD/CAM) software systems.

While using CAD/CAM applications it is often desirable to model the spatial inclusion or total area a moving part will occupy during travel. The spatial inclusion of a moving part can be referred to as the swept volume. It is useful to determine the envelope or boundaries of a swept volume in order to design in adequate clearances for a part. Clearances are necessary, for example, to avoid unanticipated contacts of a part in motion with surrounding objects. In addition, accurate modeling of a swept volume allows for efficiency in terms of space cost. It is often useful to design a feature as compact as possible.

In some currently available systems, parts in motion can be modeled using multi-instantiation of the moving object. This technique produces models of a part at several instants during the part motion. As the number of instantaneous models produced increases the smoother a transition from one model to the next. Acceptable quality using this technique tends to be processor intensive, requiring the creation of multiple images of the part.

Another technique uses multi-instantiation of a moving object combined with Boolean operations. This technique improves on the straight multi-instantiation model by allowing for extrapolation from one instantaneous model to another. The extrapolation can smooth the surface representation of the resultant model. However this modeling technique still involves creation of multiple instantaneous models and requires intensive processing.

Other approaches include use of voxel representation of a swept volume or use of a marching cubes algorithm

SUMMARY OF THE INVENTION

Accordingly, the present invention provides a method and apparatus of modeling a swept volume for a computer simulated object.

In general in one aspect the invention includes generating a polyhedral representation of a computer modeled object and representing motion of the object with a set of position matrices. With this invention a subset of free neighborhood entities can be determined for each matrix and traces of the motion of the free neighborhood entities can be generated. A representation of the swept volume from the traces can be constructed. Free neighborhood entities can include for example, an edge or a triangle.

In one embodiment, a free neighborhood can be represented by an angular portion for different types of entities comprising the boundary of the polygon. Other aspects include a material zone represented by a half sphere containing material of the object and delimited by a plane of a triangle, or a free neighborhood including a tangent zone represented by two portions of a sphere, wherein the two portions of the sphere are delimited by planes of adjacent triangles.

Generally, another aspect includes a polyhedral representation with two triangles representing translational motion of an edge. Polyhedral representation can also include four triangles representing translational and rotational motion of an edge.

In another embodiment, an entity comprising an object and moving inside the material path of the object is filtered, allowing efficiency of processing.

This invention can also embody a computer system, a programmed computer, a computer program residing on a computer-readable medium or a method of interacting with a computer and embodying the concepts described above.

The details of one or more embodiments of the invention are set forth in the accompanying drawings and the description below. Implementations can provide advantages such as the capability of efficiently producing a computer model of the spatial inclusion or total area a moving part will occupy during travel. Other features, objects, and advantages of the invention will be apparent from the description, the drawings and the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

- FIG. 1 is an illustration of a computer conforming to this invention.
- FIG. 2 illustrates simple polyhedral representation of an object.
- FIG. 3 illustrates an edge in a polyhedral representation traced through a bend.
- FIG. 4 illustrates a polygon submitted to translation.
- FIG. 5 illustrates Free Neighborhood Tangent and Material zones.
- FIG. 6 illustrates motion vectors indicating translation of a polygon.
- FIG. 7 illustrates tracking of Free Neighborhood entities.
- FIG. 8 illustrates tracking translation of a polygon.
- FIG. 9 illustrates forming a swept volume boundary from the translation of Fig. 8.
- FIG. 10 is a flow chart of one embodiment of a process for swept volume generation.
- FIG. 11 illustrates a swept volume model of a cylinder experiencing translation.
- FIG. 12 illustrates a swept volume model of a cylinder experiencing translation and rotation.
- FIG. 13 illustrates a piston, connecting rod and crankshaft at rest.
- FIG. 14 illustrates a swept volume model of the piston, connecting rod and crankshaft, with the piston and connecting rod showing motion.

DETAILED DESCRIPTION OF THE INVENTION

Referring to Fig. 1 physical resources of a computer system 100 are depicted. The computer 100 has a central processor 101 connected to a processor host bus 102 over which it provides data, address and control signals. The processors 101 may be any conventional general purpose single-chip or multi-chip microprocessor such as a Pentium® series processor, a K6 processor, a MIPS® processor, a Power PC® processor or an ALPHA® processor. In addition, the processor 101 may be any conventional special purpose microprocessor such as a digital signal processor or a graphics processor. The microprocessor 101 can have conventional address, data, and control lines coupling it to a processor host bus 102.

The computer 100 can include a system controller 103 having an integrated RAM memory controller 104. The system controller 103 can be connected to the host bus 102 and provide an interface to random access memory 105. The system controller 103 can also provide host bus to peripheral bus bridging functions. The controller 103 can thereby permit signals on the processor host bus 102 to be compatibly exchanged with signals on a primary peripheral bus 110. The peripheral bus 110 may be, for example, a Peripheral Component Interconnect (PCI) bus, an Industry Standard Architecture (ISA) bus, or a Micro-Channel bus. Additionally, the controller 103 can provide data buffering and data transfer rate matching between the host bus 102 and peripheral bus 110. The controller 103 can thereby allow, for example, a processor 101 having a 64-bit 66 MHz interface and a 533 Mbytes/second data transfer rate to interface to a PCI bus 110 having a data path differing in data path bit width, clock speed, or data transfer rate.

Accessory devices including, for example, a hard disk drive control interface 111 coupled to a hard disk drive 114, a video display controller 112 coupled to a video display 115, and a keyboard and mouse controller 113 can be coupled to a peripheral bus 110 and controlled by the processor 101. The computer system can include a connection to a computer system network, an intranet or an internet. Data and information may be sent and received over such a connection.

The computer 100 can also include non-volatile ROM memory 107 to store basic computer software routines. ROM 107 may include alterable memory, such as EEPROM (Electrically Erasable Programmable Read Only Memory), to store configuration data. BIOS routines 123 can be included in ROM 107 and provide basic computer initialization, systems testing, and input/output (I/O) services. The BIOS 123 can also include routines that allow an operating system to be "booted" from the disk 113. Examples of high-level operating systems are, the Microsoft Windows 98™, Windows NT™, UNIX™, LINUX, the Apple MacOS™ operating system, or other operating system.

An operating system may be fully loaded in the RAM memory 105 or may include portions in RAM memory 105, disk drive storage 114, or storage at a network location. The operating system can provide functionality to execute software applications, software systems and tools of software systems. Software functionality can

access the video display controller 112 and other resources of the computer system 100 to provide two dimensional (2-D) and three dimensional (3-D) models on the video computer display 115.

Referring now to Fig. 2 a computer generated model displayed, for example, on a CAD/CAM system, can include an object having a polyhedral representation, wherein the object is represented by a set of triangles. Motion of the object can be represented by an ordered set of position matrices. Each matrix can contain a set of triangles correlating to similar triangles at a previous and/or next position. One model of object motion can assume that the motion is linear between two consecutive matrix positions. Polyhedral representation of an edge in motion can be represented by two or four triangles. An edge one 201-202 experiencing only translational motion can be represented by two triangles. An edge two 203-204 experiencing translational and rotational motion can be represented by four triangles. For example edge one 201 at time t can travel through translation only, to become an edge at time $t + \Delta t$ 202. This translation motion of edge one can be represented by two triangles 211 and 212. The direction of the motion can be represented by one arrow 214.

Motion can also include a combination of translation and rotation. Edge two at time t 203 can experience translational and rotational motion until it becomes edge two at time $t + \Delta t$ 204. The polyhedral representation of edge two through the translation and rotation can include four triangles 221-224. The direction of the motion can be represented by two arrows 230 and 231.

Motion can be simulated on a model by selection from a user menu or other interactive device, such as an icon, or a command line entry. A user can specify a motion type such as rotation, linear motion, or arced motion, and then select a model object to impart the motion to. Another option includes selecting an object and then selecting a motion to impart to the object. Selection can be effected with a pointing device, keyboard, stylus pen, touchscreen or other user entry device.

In another embodiment, motion data can be stored in a database and later referenced to simulate the motion relating to the data. Data included in the database can be compiled from actual experiments or other real world collection methods. For example, sensors attached to the wheel of a car can monitor rotational speed and vertical

motion as the car is driven. The data collected from the sensors can be stored in a database. The database can be referenced by a computer defined model to emulate the motion of the wheel. In this manner, most movements occurring in nature that can be monitored can be emulated by the computer model. In addition, data can be entered manually through an input device such as a keyboard or otherwise compiled. The computer defined model can emulate motion represented by the data.

To represent a swept volume the present invention can determine the boundaries of the volume, i.e. a set of surfaces (2-D entities) that close the volume. This boundary or envelope can be calculated in a computer defined model. At a time t , a point belonging to a boundary of a moving object belongs to the boundary of its swept volume if its neighborhood with respect to the swept volume is not full, that is if the point is not inside the material of the object. The neighborhood of a point with respect to the swept volume can be equal to the swept volume generated by the motion of the neighborhood of the point with respect to the moving object. For a point p , a free neighborhood can be a set of points belonging to the neighborhood of p such that the neighborhood generated from a motion of point p is not full. A neighborhood of point p is not full if p remains on the boundary of the swept volume during the motion and does not enter the interior boundary of the material. A point moving in its free neighborhood can be equivalent to a point sliding along the surface of the material of the object modeled.

A boundary of a swept volume can generally be modeled by determining for each time t a subset of points belonging to the boundary of the moving object and sliding along the boundary of the swept volume. This determination can be based on a study of the free neighborhood of the point. A trace can be computed and generated by the motion of the point. The swept volume can be constructed from representation of multiple traces.

Referring now to Fig. 3, a triangle 310 representing an edge in a polyhedral representation of an object can be traced through an "elbow" during motion. The trace 300 can include multiple instantiations of the triangle 320-325. The direction of the motion can be indicated by directional arrows 311 and 312. Points can belong to an edge in a 2-D representation, or a triangle in a 3-D representation. Points can have similar neighborhoods and also similar free neighborhoods. Therefore, if one point included in

the edge or the triangle entity of the boundary of the moving object is moving inside its free neighborhood, then the entire entity is moving inside its free neighborhood.

Two types of free neighborhood can be utilized in a swept volume computation. The free neighborhood of a triangle can be represented with a half-sphere containing material and delimited by the plane of the triangle. This type of free neighborhood can be referred to as the material zone.

The free neighborhood of an edge can be represented by two portions of a sphere, delimited by the planes of the adjacent triangles. This type of neighborhood can be referred to as a tangent zone.

Referring now to Fig. 4, a polygon 410 can be submitted to a translation. A trajectory 420 of the translation can be tracked, for example, from a point such as a center point in each instantiation 410-413 of the polygon.

Referring now to Fig.5, a free neighborhood can be represented by an angular portion for different types of entities belonging to the boundary of a polygon. For example, a free neighborhood can be based on tangent vectors 531 and 532 of a point 520 with respect to the adjacent edges. In the case of an edge 511, a free neighborhood or material zone can be based on the normal vector 512.

Triangles included in the free neighborhood of a 2-D edge can be represented by a half sphere 510 containing material of the object and limited by the plane of the triangle. The half sphere 510 can be referred to as a material zone. In the case of an edge, represented in 2-D by a point 520, the free neighborhood can be represented by two portions of a sphere 521 and 522. The spheres can be delimited by the planes of adjacent triangles 531 and 532. The free neighborhood of an edge 521 and 522 can be referred to as a tangent zone.

Referring now to Fig. 6, motion vectors 611-613 can indicate the translation of different entities included in the polygon object. The motion vectors 611-613 can correlate to the trajectory 420 of the polygon object 405. Entities can include, for example, an edge 630, or a triangle 620.

Referring now to Fig. 7, entities remaining on the boundary of the swept volume, can be tracked and included in the computation of the polyhedron forming the swept volume. Those entities that enter inside the path of the material of the polygon object can

be filtered out thereby economizing processor power. For example, an edge 720 following a motion vector 721, can travel through a tangent zone 521. Therefore the edge 720 can be tracked and used in a swept volume model. Similarly, triangle 730 translating along vector 731 can travel through a material zone 510. Therefore, triangle 730 can be tracked to determine a swept volume model.

Filters can be applied to parts travelling through a material path of a polygon. Filtering can reduce computations executed by the computer processor 101. For example, edge 710 translating along vector 711 travels through the material path of polygon 405. Therefore edge 710 can be filtered out of a swept volume computation.

Referring now to Fig. 8, a set of traces 810-816 tracking a translation of a polygon object 405 can form a swept volume boundary 910 displayed in Fig. 9.

Referring now to Fig. 10, in one embodiment, a logical flow including the steps 1010-1027 can represent a process used to determine the swept volume generated by a motion of a polyhedral object. A "Start Swept Volume" command 1010 commencing execution of a Swept Volume program can be issued by a user or called from another program executing on a computer 100. A moving body can be selected from a computer generated model display 1011. Selection can be accomplished with a mouse or other pointing device or with an input device such as a keyboard. The program can extract an array of triangles and edges 1012. Extraction can reference stored triangle information and insert it into a diagram without modifying the information.

The motion can be selected through the selection of position matrices 1013. A loop can then be set up for each position matrix 1014. The loop can call for the program to transform the triangles and edges array 1015. A sub-loop can be set up for each edge 1016. Within the edge sub-loop, a test can determine if a current edge is moving in a tangent zone 1017. If a current edge is moving in a tangent zone, the program can compute a trace generated by the edge 1018. In computing the trace generated by the edge 1018, the program can utilize two triangles to represent translation of a polygon and four triangles for motion including translation and rotation of the polygon.

Transformation of the triangles can include modifying the position of the triangles that make up a part, such as the connecting rod. A set order of positions can be defined from select motion position matrices representing the part at different instantiations. In

the example of the connecting rod, a triangle on the edge of an array while the connecting rod is at an original position at t_0 can have a position X_0 , Y_0 , and Z_0 . With vertical translation only, the top position of the connecting rod can be at X_0 , Y_0 , and Z_1 where Z is the vertical axis. Translation can modify the position of each point of each triangle at each edge.

Following computation of a trace generated by the edge 1018, the program can add the triangle to a table 1019. Triangles stored in the table can later be referenced to model a polyhedron representation of the swept volume. The loop can continue for each edge until a last edge has been computed 1020.

A loop for each triangle 1021 can also process. The logical order of the loops is not significant. A loop for triangles can precede a loop for edges, or an edge loop may precede a triangle loop. The loop for each triangle can test for movement of a triangle in a material zone 1022. A triangle moving through a material zone can be added to the table used to compute a polyhedron 1023. The loop for each triangle can continue until the last triangle has been tested 1024.

The matrix loop can continue to transform a triangles and edges array and run edge and triangle sub-loops for each matrix until a last matrix is reached 1025. When all matrices have been processed, the program can compute a polyhedron from information contained in a table into which the triangles have been stored 1026. Finally, a swept volume command program can come to an end 1027.

Referring now to Fig. 11, a swept volume model generated by translation motion of a cylinder is illustrated 1110. A swept volume model generated by translation and rotational motion of a cylinder is illustrated in Fig. 12 at 1210. Fig. 11 and Fig. 12 illustrate a simple cylinder object experiencing uncomplicated translation and rotational motion patterns.

Referring now to Fig. 13, an illustration a slightly more complicated model is shown. A piston 1310 is connected to a connecting rod 1320 and a crankshaft 1330 is modeled. Rotation of the crankshaft 1330 can cause translational and rotational movement in the connecting rod 1320 and translational movement in the piston 1310. Fig. 14 illustrates a swept volume model 1410 of the piston 1310 experiencing a translational motion. A swept volume model 1420 is also illustrated for the translational

and rotational motion of the connecting rod 1320. Movement of the crankshaft 1330 has not been modeled. A user can select particular objects included in the model and construct a swept volume model for the selected objects only. This select process can provide clarity to the swept volume model in the context of the objects illustrated.

The invention may be implemented in digital electronic circuitry, or in computer hardware, firmware, software, or in combinations of them. Apparatus of the invention may be implemented in a computer program product tangibly embodied in a machine-readable storage device for execution by a programmable processor; and method steps of the invention may be performed by a programmable processor executing a program of instructions to perform functions of the invention by operating on input data and generating output.

The invention may advantageously be implemented in one or more computer programs that are executable on a programmable system including at least one programmable processor coupled to receive data and instructions from, and to transmit data and instructions to, a data storage system, at least one input device, and at least one output device. Each computer program may be implemented in a high-level procedural or object-oriented programming language, or in assembly or machine language if desired; and in any case, the language may be a compiled or interpreted language.

Generally, a processor will receive instructions and data from a read-only memory and/or a random access memory. Storage devices suitable for tangibly embodying computer program instructions and data include all forms of non-volatile memory, including by way of example semiconductor memory devices, such as EPROM, EEPROM, and flash memory devices; magnetic disks such as internal hard disks and removable disks; magneto-optical disks; and CD-ROM disks. Any of the foregoing may be supplemented by, or incorporated in, specially-designed ASICs (application-specific integrated circuits).

A number of embodiments of the present invention have been described. It will be understood that various modifications may be made without departing from the spirit and scope of the invention. Therefore, other implementations are within the scope of the following claims.

CLAIMS

What is claimed is:

- 1) A software control method of modeling a swept volume for a computer simulated object comprising:
generating a polyhedral representation of a computer modeled object;
representing motion of the object with a set of position matrices;
determining a subset of free neighborhood entities comprising the object for each matrix;
generating traces by the motion of the free neighborhood entities; and
constructing a representation of the swept volume from the traces.
- 2) The software control method of claim 1 wherein the free neighborhood entity is an edge.
- 3) The software control method of claim 1 wherein the free neighborhood entity is a triangle.
- 4) The software control method of claim 1 wherein a free neighborhood is represented by an angular portion for different types of entities comprising the boundary of the polygon.
- 5) The software control method of claim 4 wherein a free neighborhood comprises a material zone represented by a half sphere containing material of object and delimited by a plane of a triangle.
- 6) The software control method of claim 4 wherein the free neighborhood comprises a tangent zone represented by two portions of a sphere, wherein the two portions of the sphere are delimited by planes of adjacent triangles.
- 7) The software control method of claim 1 wherein the polyhedral representation comprises two triangles representing translational motion of an edge.
- 8) The software control method of claim 1 wherein the polyhedral representation comprises four triangles representing translational and rotational motion of an edge.
- 9) The software control method of claim 1 wherein the motion between two consecutive matrices is assumed to be linear.

- 10) The software control method of claim 1 wherein an entity comprising an object and moving inside the material path of the object are filtered.
- 11) A computer system for controlling generation of a swept volume model the system comprising:
 - a processor operatively interconnected to a memory;
 - a user input device;
 - a display; and
 - a graphical user interface responsive to activation with the user input device by causing the a program stored in the memory to be executed by the processor wherein a polyhedral representation of a computer modeled object is generated; motion of the object is represented with a set of position matrices;
 - a subset of free neighborhood entities comprising the object is determined for each matrix;
 - traces are generated by the motion of the free neighborhood entities; and
 - a representation of the swept volume is constructed from the traces.
- 12) The computer system of claim 11 wherein the position matrices representing motion of the free neighborhood entities are created referencing a database comprising data collected during physical experiments.
- 13) The computer system of claim 11 wherein the position matrices representing motion of the free neighborhood entities are calculated in response to selection of a motion type from a user interactive menu.
- 14) The computer system of claim 11 wherein a free neighborhood entity comprising an edge is determined by testing for movement of the edge through a tangent zone.
- 15) The computer system of claim 11 wherein a free neighborhood entity comprising a triangle is determined by testing for movement through a material zone.
- 16) A computer program residing on a computer-readable medium, the program comprising instructions for causing the computer to:
 - select an object;
 - extract an array of free neighborhood of triangles and edges from the object based on a trajectory;

select a position matrix;
transform an array of triangles and edges according to the position matrix;
compute a trace for an edge comprising the array and moving through a tangent zone and adding the edge to a table or adding a triangle moving through a material zone to the table; and
modeling a polyhedron from data stored in the table.

- 17) A computer program residing on a computer-readable medium, the program comprising instructions for causing the computer to:
generate a polyhedral representation of a computer modeled object;
represent motion of the object with a set of position matrices;
determine a subset of free neighborhood entities comprising the object for each matrix;
generate traces by the motion of the free neighborhood entities; and
construct a representation of the swept volume from the traces.
- 18) The computer program residing on a computer-readable medium of claim 19 wherein an entity comprising an object and moving inside the material path of the object are filtered.
- 19) A method for interacting with a computer so as to model a swept volume comprising the steps of:
launching a program that includes a command to generate a swept volume model;
selecting an object to model;
selecting a motion to be applied to the object; and
issuing a command to generate a polyhedron representing a swept volume.
- 20) The method of interacting with a computer of claim 19 wherein the motion selected is translational motion.

ABSTRACT

A method and apparatus of modeling a swept volume for a computer simulated object by generating a polyhedral representation of the object and representing motion of the object with a set of position matrices. A subset of free neighborhood entities can be determined for each matrix and traces of the motion of the free neighborhood entities can be generated. A representation of the swept volume from the traces is constructed. Free neighborhood entities can include for example, an edge or a triangle. A free neighborhood can be represented by an angular portion for different types of entities comprising the boundary of the polygon. a material zone represented by a half sphere containing material of the object and delimited by a plane of a triangle, or a free neighborhood including a tangent zone represented by two portions of a sphere, wherein the two portions of the sphere are delimited by planes of adjacent triangles.

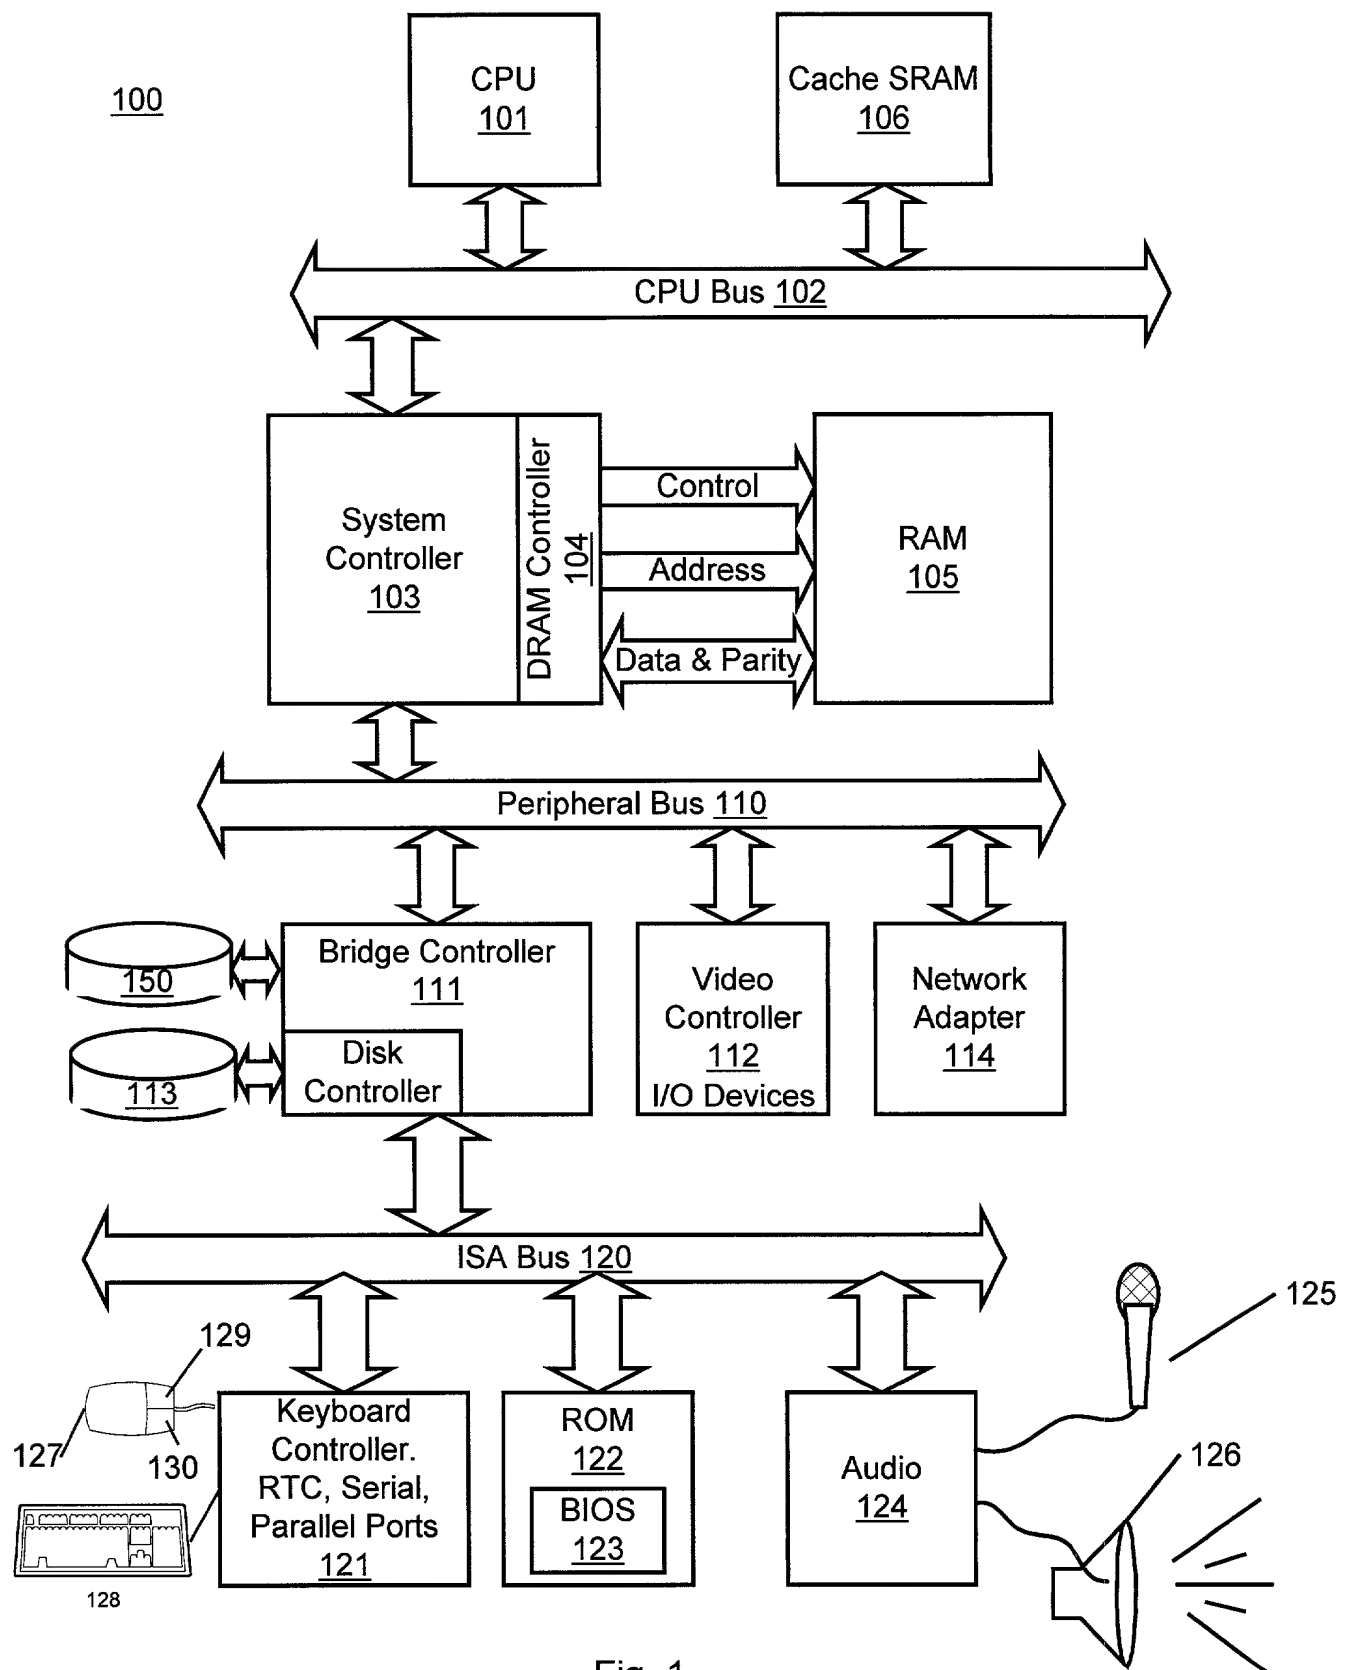


Fig. 1
(Prior Art)

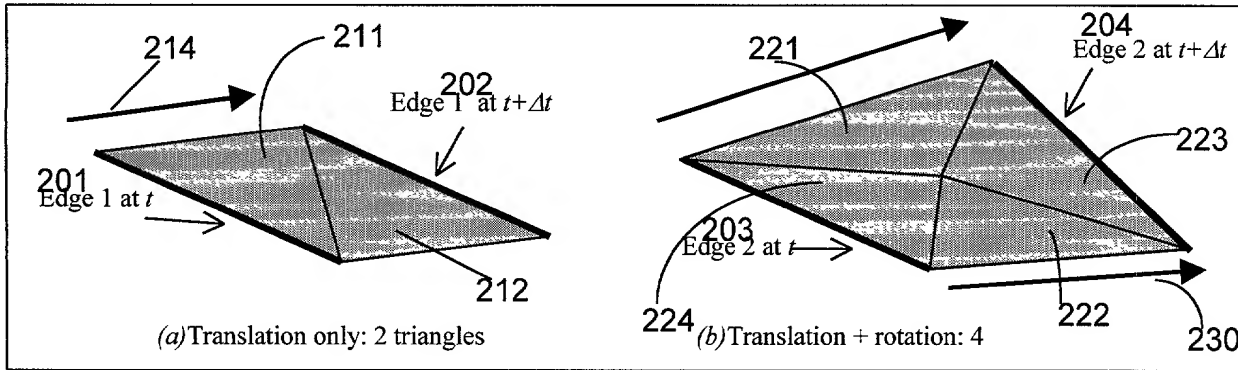


Fig. 2


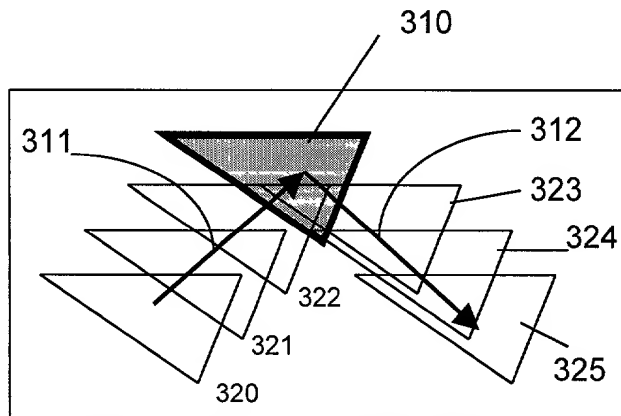


Figure 2 : trace left by a triangle at an "elbow" during a motion.

Fig.3


2D Example:

Polygon submitted to a translation.

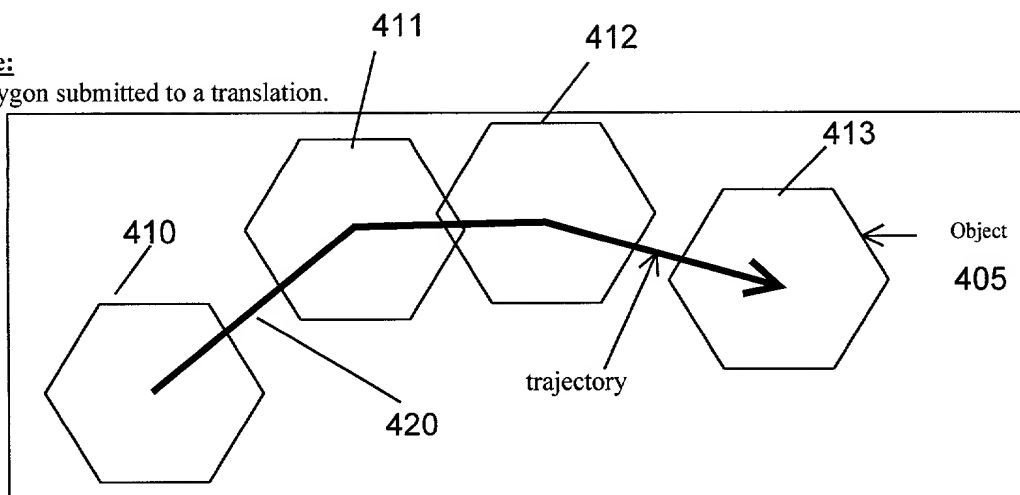


motion of a polygon in 2D

Fig. 4

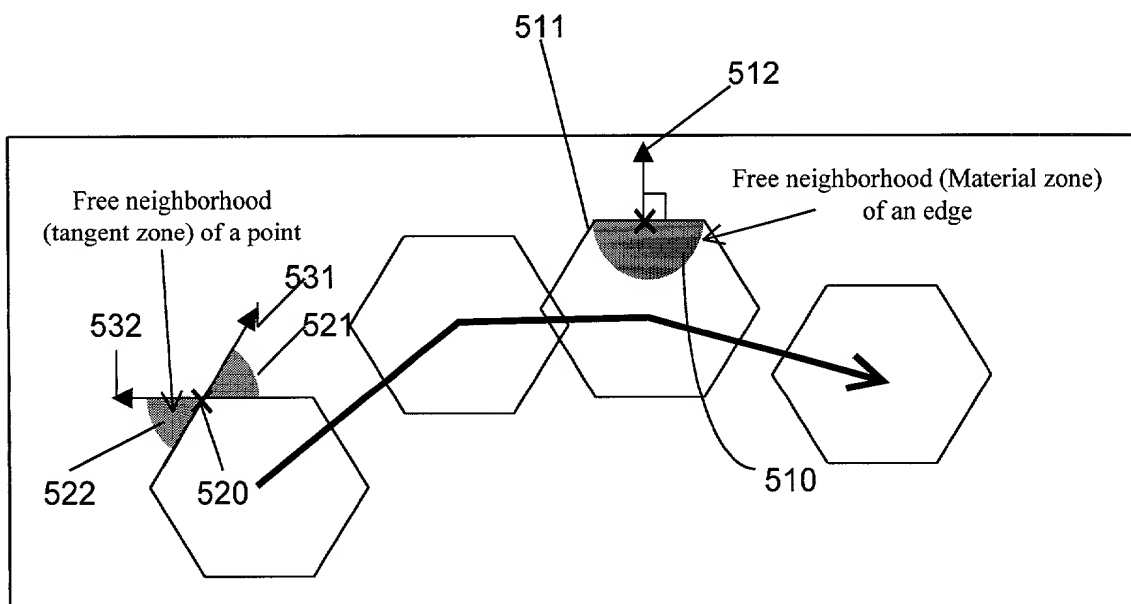


free neighborhoods

Fig. 5

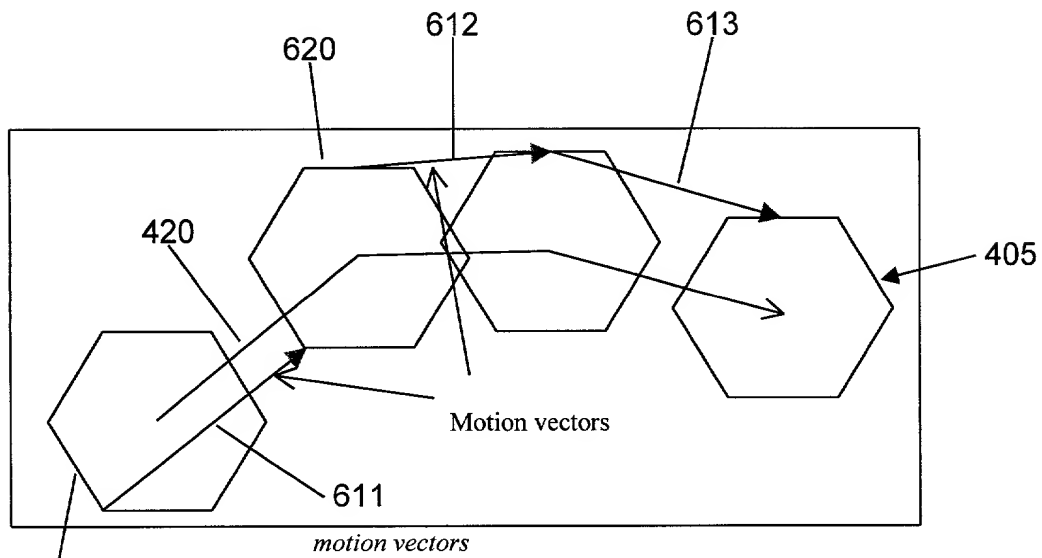

630

Fig. 6

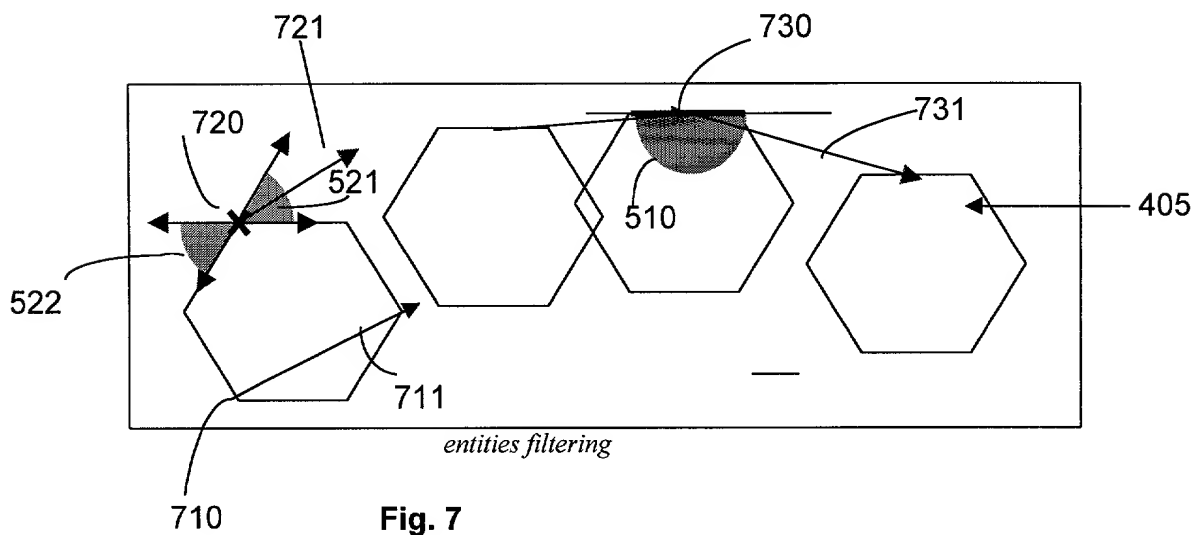

710

Fig. 7

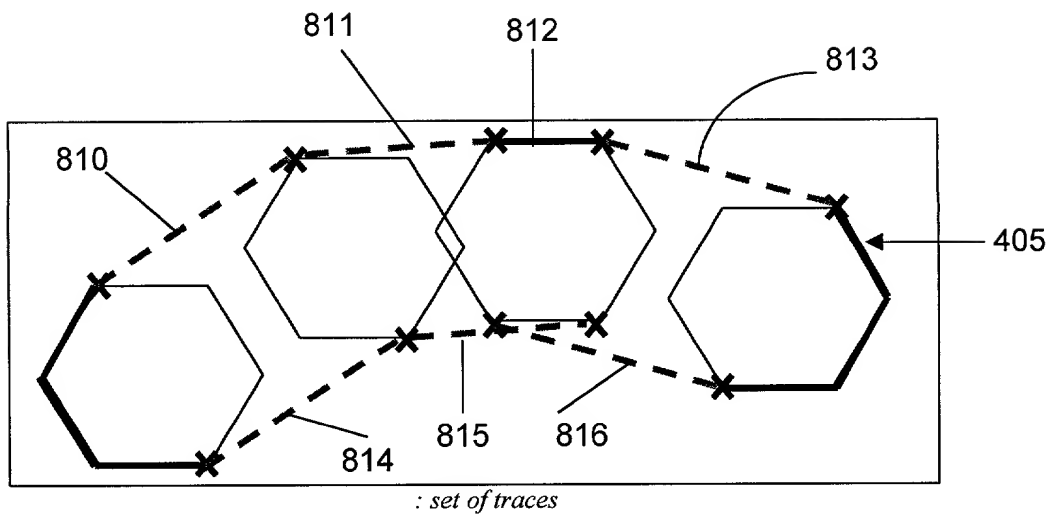


Fig. 8

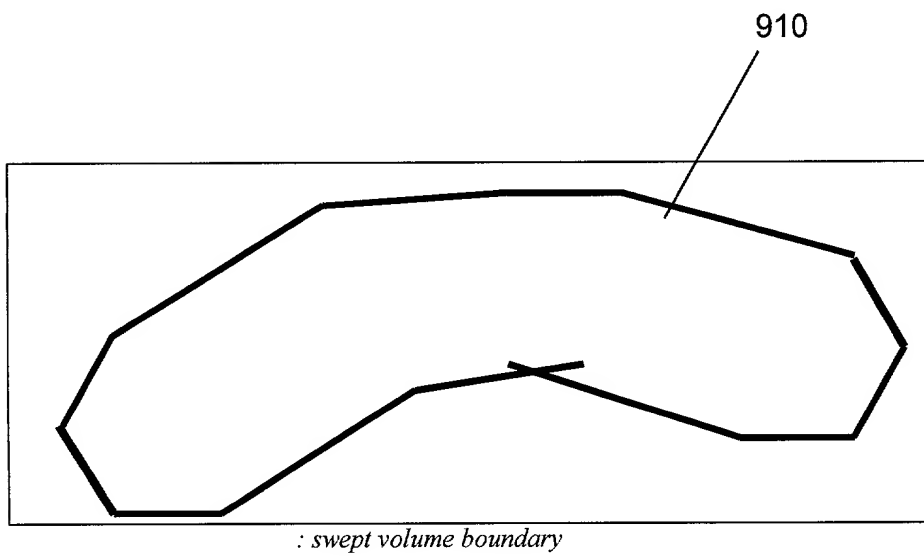


Fig. 9

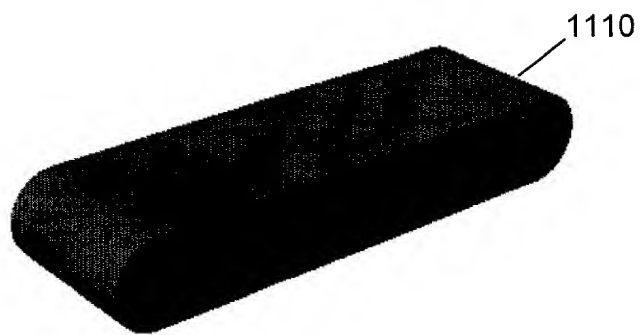


Fig. 11

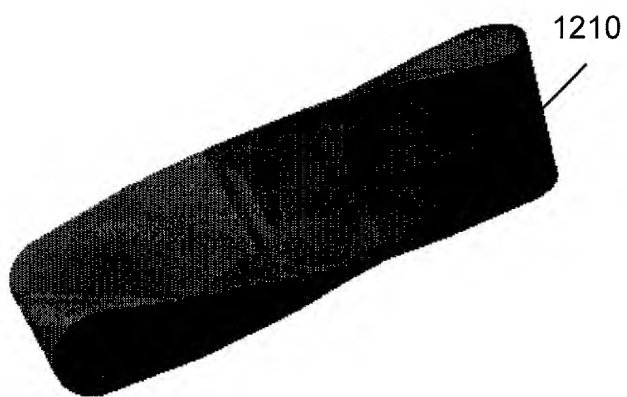


Fig. 12

Fig. 13



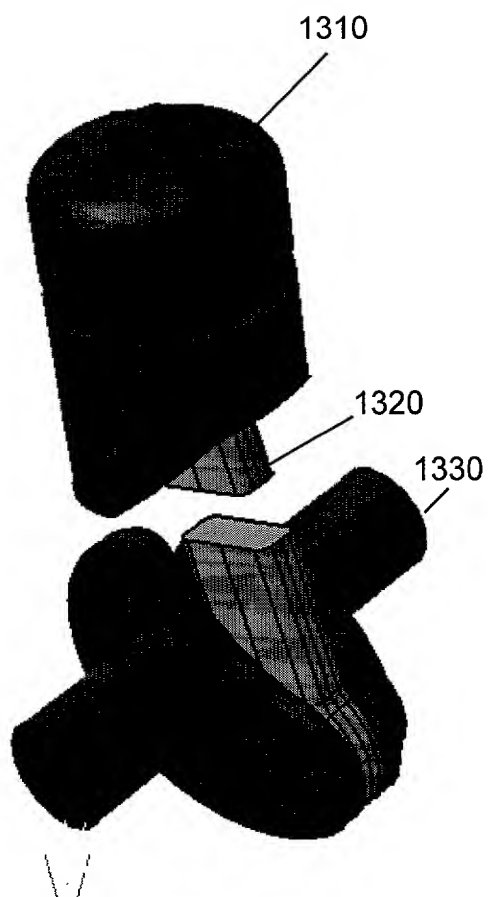


Fig. 14

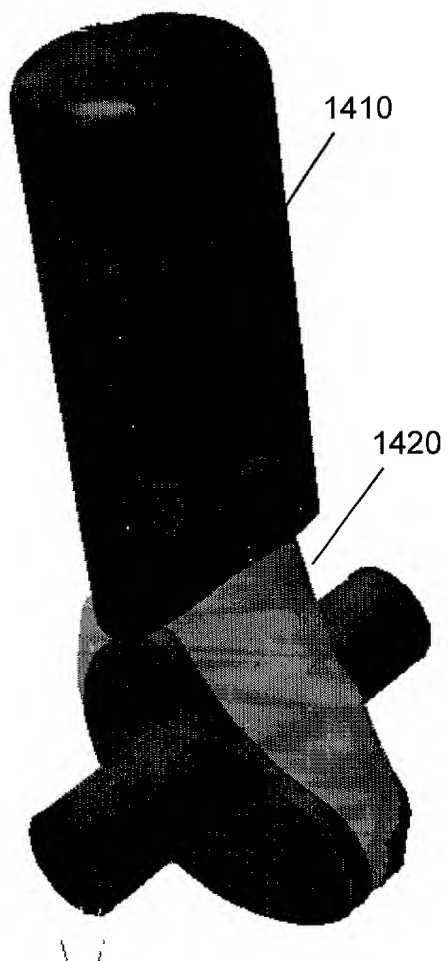

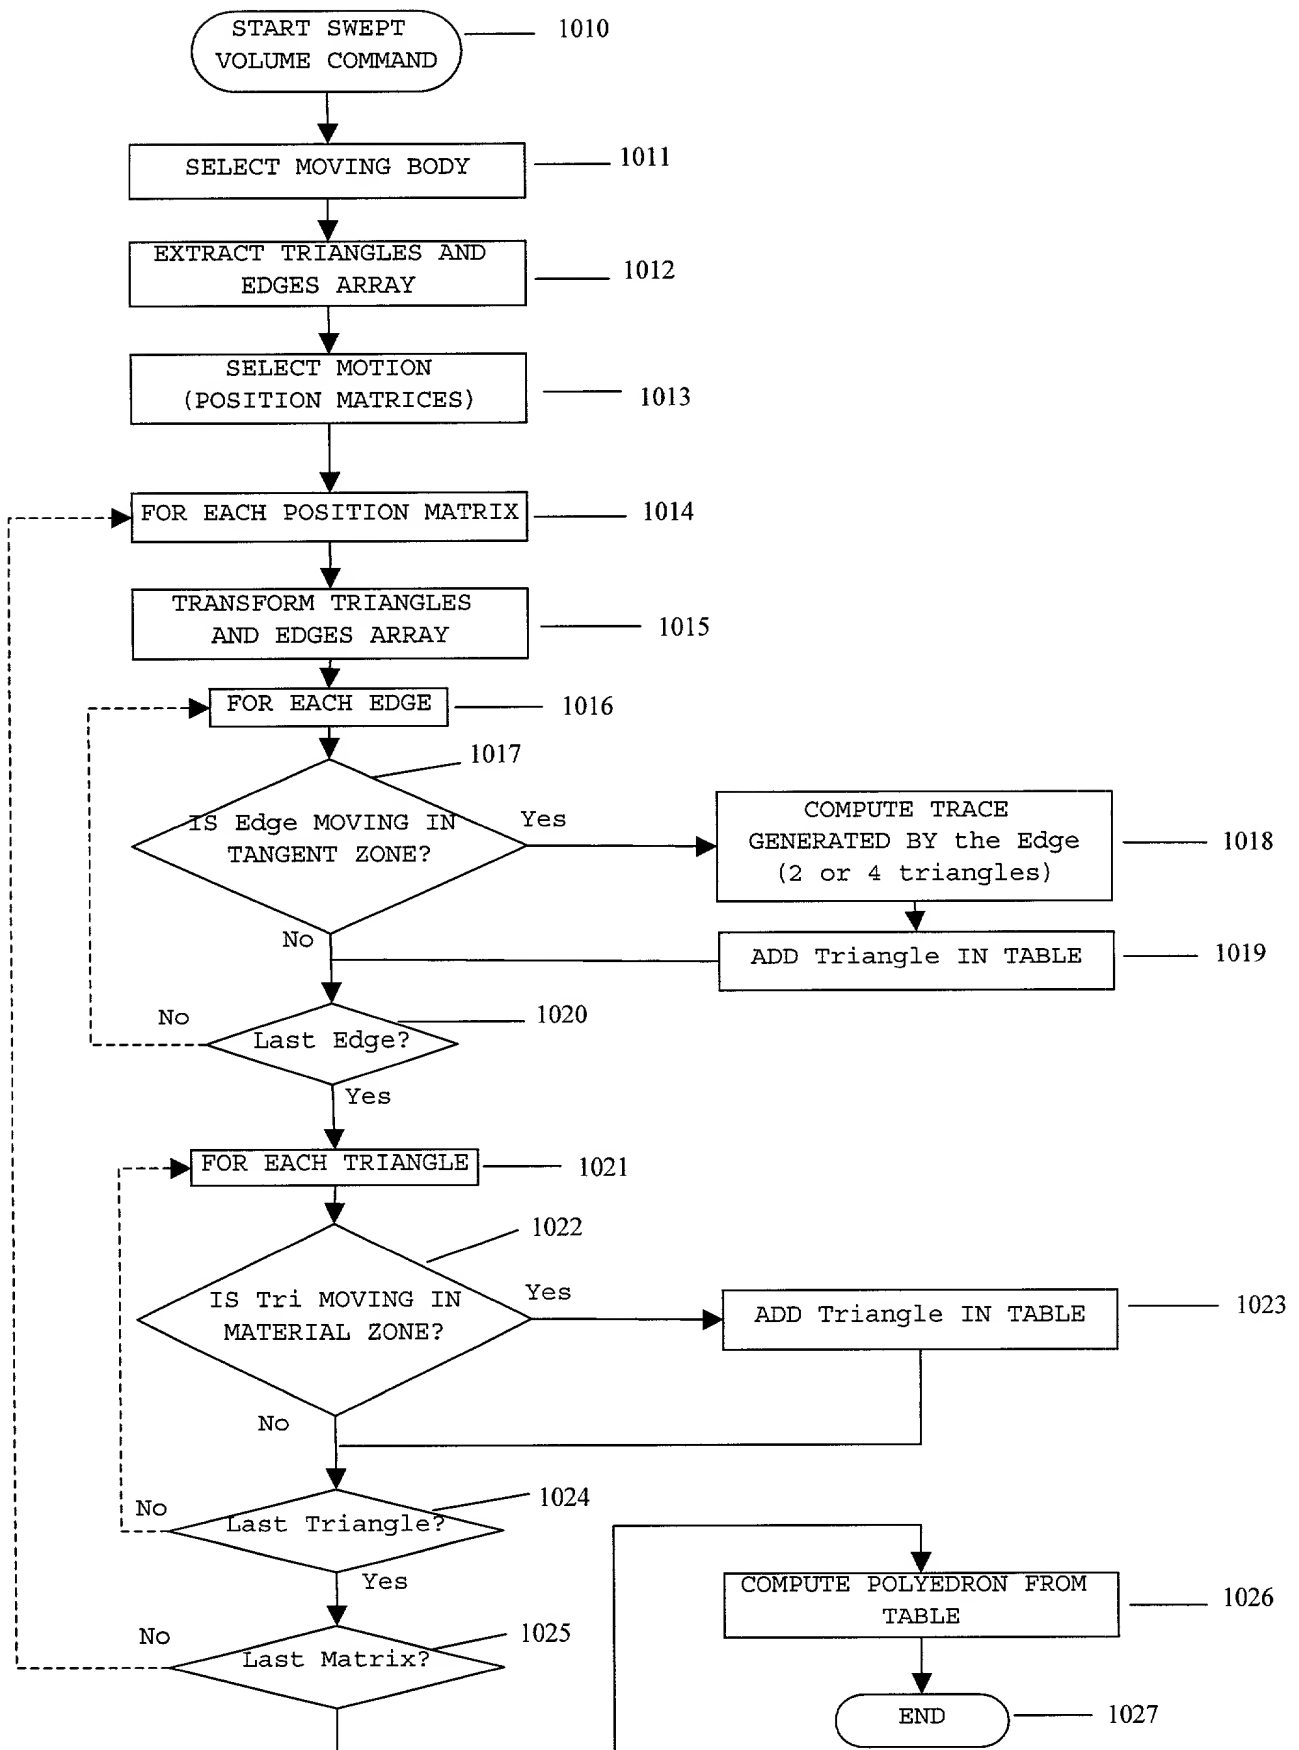

COMBINED DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My resident, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **SWEPT VOLUME**, the specification of which

- ☒ is attached hereto.
- ☐ was filed on _____ as Application Serial No. _____ and was amended on _____.
- ☐ was described and claimed in PCT International Application No. _____ filed on _____ and as amended under PCT Article 19 on _____.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amended referred to above.

I acknowledge the duty to disclose all information I know to be material to patentability in accordance with Title 37, Code of Federal Regulation, § 1.56.

And I hereby appoint John E. Kidd, Reg. No. 19,916; Victor Siber, Reg. No. 25,149, Margaret B. Kelley, Reg. No. 29,181; Philip E. Roux, Reg. No. 31, 295; C. Joseph Laughon, II, Reg. No. 31,389; Leora Ben-Ami, Reg. No. 32,455; Robert D. Schaffer, Reg. No. 33,775; Michael O'Shea, Reg. No. 35,631; Gerard P. Norton, Reg. No. 36,621; John Johnson, Reg. No. 37,363; Frank Cimino, Reg. No. 39,945; Frank J. Nuzzi, Reg. No. 42,944; Joseph P. Kincart, Reg. No. 43,716, all of the firm of Rogers & Wells, 200 Park Avenue, New York, New York, 10166 my attorney with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

Address all telephone calls to Joseph P. Kincart at telephone number (212) 878-3289

Address all correspondence to Joseph P. Kincart, Rogers & Wells LLP, 200 Park Avenue, New York, NY 10166.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patents issued thereon.

Full Name Of Inventor: Stephane Boussac

Inventor's Signature: _____ Date: _____

Residence Address 9, rue Aristide Briand, 92130 Issy les Moulineaux, France

Citizen Of: France

Post Office Address: _____

Full Name Of Inventor: Denis Capot-rey

Inventor's Signature: _____ Date: _____

Residence Address 22, rue du Hameau, 75015 Paris, France

Citizen Of: France

Post Office Address: _____

Full Name Of Inventor: Laurent Juge

Inventor's Signature: _____ Date: _____

Residence Address 21, rue Paul Louis Courier, 92500 Rueil-Malmaison, France

Citizen Of: France

Post Office Address: _____

NYB 1050809.1